


52005

Installation Instructions

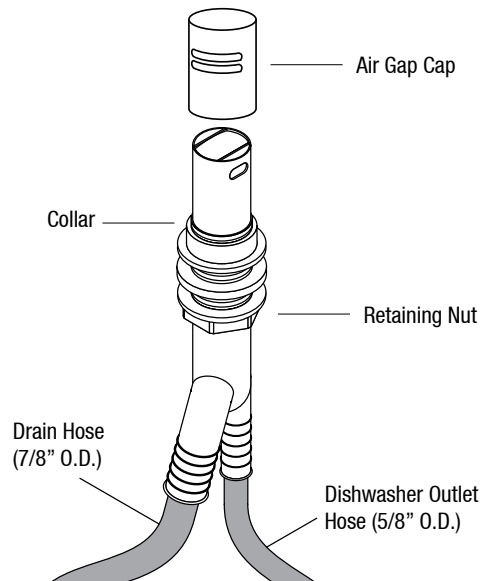

Note: Dishwasher Air Gap Body does not include the cap. Caps, in various finishes, are sold separately.

1. Turn the power off for the dishwasher at the main circuit breaker.
2. Unthread the collar from the air gap body.
3. Slip the air gap body up through the mounting hole from underneath the sink deck. Ensure $\frac{1}{2}$ " of the air gap threads are visible above the sink deck.
4. Thread collar onto air gap body. Tighten the retaining nut to secure air gap body in place.
5. Snap cap (sold separately) onto air gap body.
6. Attach the dishwasher outlet hose (5/8" O.D.) to the air gap inlet (straight leg of the air gap). Secure hose with a clamp.
7. Attach the garbage disposal hose or drain hose (7/8" O.D.) to the air gap outlet (angled leg of the air gap). Secure hose with a clamp.
8. Turn on power for the dishwasher at the main circuit breaker. Check for leaks.

Tools needed for installation: • Screwdriver